

**AIAA 2003-163**

**FLUID FLOW AND HEAT  
TRANSFER FROM A PIN FIN:  
ANALYTICAL APPROACH**

W. A. Khan, J. R. Culham, and M. M. Yovanovich  
Microelectronics Heat Transfer Laboratory  
Department of Mechanical Engineering  
University of Waterloo  
Waterloo, Ontario, CANADA

**41st Aerospace Sciences Meeting & Exhibit  
6-9 January 2003  
Reno, Nevada**

# FLUID FLOW AND HEAT TRANSFER FROM A PIN FIN: ANALYTICAL APPROACH

W. A. Khan\*, J. R. Culham†, and M. M. Yovanovich‡

Microelectronics Heat Transfer Laboratory  
Department of Mechanical Engineering  
University of Waterloo  
Waterloo, Ontario, Canada N2L 3G1

## ABSTRACT

In this study an approximate analytical method, known as the Von Karman-Pohlhausen method, is used to investigate fluid flow and heat transfer from cylindrical pin fins. A fourth order velocity profile in the hydrodynamic boundary layer and a third order temperature profile in the thermal boundary layer are used to obtain a closed form solution for the fluid flow and heat transfer from a cylindrical pin fin. The momentum and energy equations in the integral form are used to obtain the solution. Both isothermal and isoflux boundary conditions are applied. The results for both boundary conditions are found to be in a good agreement with experimental/numerical data for a single circular cylinder. The effects of free stream turbulence and blockage are not considered in this study.

## NOMENCLATURE

$C_D$	total drag coefficient
$C_{Df}$	friction drag coefficient
$C_{Dp}$	pressure drag coefficient
$C_f$	skin friction coefficient $\equiv 2\tau_w/\rho U_\infty^2$
$C_p$	pressure coefficient $\equiv 2\Delta p/\rho U_\infty^2$
$c_p$	specific heat of the fluid [kJ/kgK]

Copyright ©2002 by W. A. Khan, J.R. Culham, and M. M. Yovanovich. Published by the American Institute of Aeronautics and Astronautics, Inc. with permission.

\*Graduate Research Assistant

†Director, Microelectronics Heat Transfer Lab.

‡Distinguished Professor Emeritus, Fellow AIAA

$D$	cylinder diameter [m]
$k$	thermal conductivity [W/mK]
$\bar{h}$	average heat transfer coefficient [W/m <sup>2</sup> K]
$Nu_D$	average Nusselt number based on the diameter of the cylinder $\equiv \bar{h} D/k_f$
$Pr$	Prandtl number $\equiv \nu/\alpha$
$p$	pressure [N/m <sup>2</sup> ]
$q$	heat flux [W/m <sup>2</sup> ]
$Re_D$	Reynolds number based on the diameter of the cylinder $\equiv DU_\infty/\nu$
$T$	temperature [°C]
$x$	distance along the curved surface of the circular cylinder measured from the forward stagnation point [m]
$y$	distance normal to and measured from the surface of the circular cylinder [m]
$u$	x - component of velocity in the boundary layer [m/s]
$v$	y - component of velocity in the boundary layer [m/s]
$U(x)$	potential flow velocity just outside the boundary layer $\equiv 2U_\infty \sin\left(\frac{2x}{D}\right)$ [m/s]

## Subscripts

$f$	fluid or friction
$\infty$	free stream conditions
$p$	pressure
$r, \theta$	radial and transverse directions in the plane polar coordinates
$s$	separation
$T$	temperature
$w$	wall

$s$	separation
$T$	temperature
$w$	wall
<i>Greek Symbols</i>	

$\delta$	hydrodynamic boundary-layer thickness [ $m$ ]
$\delta_1$	displacement thickness [ $m$ ]
$\delta_2$	momentum thickness [ $m$ ]
$\delta_T$	thermal boundary layer thickness [ $m$ ]
$\lambda$	pressure gradient parameter
$\mu$	absolute viscosity of the fluid [ $kg/m\ s$ ]
$\nu$	kinematic viscosity of the fluid [ $m^2/s$ ]
$\rho$	density of the fluid [ $kg/m^3$ ]
$\tau$	shear stress [ $N/m^2$ ]
$\theta$	angle measured [radians]

## INTRODUCTION

The main objective of this study is to investigate analytically the fluid flow and heat transfer from a cylindrical pin fin under isothermal and isoflux boundary conditions. In practice, a pin fin is rarely used as a single entity, but is instead, used in two-dimensional arrays. These arrays are found in many applications, such as cross flow heat exchangers, heat sinks, and electric heating elements in boilers. Cylindrical pin-fin heat sinks are used to cool electronic equipment, where heat loads are substantial and space is limited. In these heat sinks, where the arrays of pins are attached to a common base, the fluid flow over the arrays determines the manner in which the average heat transfer coefficient  $\bar{h}$  varies with location in the arrays.

It has been observed experimentally by Žukauskas<sup>1</sup> that the flow characteristics and, consequently, the convective heat transfer for the first row of pins essentially resembles that of a single circular cylinder in cross flow. However, due to mutual interaction between the pins as well as the base plate, fluid flow and heat transfer characteristics are different in subsequent rows. If these interactions are neglected, then a single average heat transfer coefficient as well as drag coefficient can be assigned to each single pin which will be pertinent to an isolated cylinder. In this study a circular cylinder is considered in cross flow with air to investigate the fluid flow and heat transfer from a cylindrical pin fin for a wide range of parameters.

## LITERATURE REVIEW

A review of existing literature reveals that most of the studies related to a single isolated cylinder are experimental or numerical. No analytical study exists to investigate the fluid flow and heat transfer together from a single isolated cylinder, that can be used for a wide range of Reynolds number as well as Prandtl number. Flow past a cylinder has been investigated experimentally/numerically by numerous authors. Žukauskas<sup>1</sup>, Lamb<sup>2</sup>, Roshko<sup>3</sup>, Achenbach<sup>4</sup>, and Schlichting<sup>5</sup> studied the influence of Reynolds number on separation point, skin friction, pressure distribution as well as the local velocity around the cylinder. Wieselsberger<sup>6</sup>, and according to Schlichting<sup>5</sup>, Flachsbar<sup>7</sup> and Roshko<sup>3</sup> investigated the influence of Reynolds number on the drag coefficients. Wieselsberger<sup>6</sup> performed extensive experimental work and showed that almost all the experimental points for the drag coefficient of circular cylinders of widely different diameters fall on a single curve. This curve is recognized as a standard curve to determine the drag coefficients of a circular cylinder. Churchill<sup>8</sup> reviewed many numerical studies for laminar flow around a cylinder. He compared different numerical methods by applying them to the calculation of friction, pressure and total drag coefficients of a circular cylinder in cross flow. He found that the most accurate results were those of Sucker and Brauer<sup>9</sup> among all the studies.

Heat transfer from a circular cylinder has been investigated also by many researchers. According to Žukauskas and Žiugžda<sup>10</sup>, Kruzhilin<sup>11</sup>, Frossling<sup>12</sup>, and Eckert<sup>13</sup>, as well as Drake et al.<sup>14</sup>, Eckert and Soehngen<sup>15</sup>, and recently, Refai Ahmed and Yovanovich<sup>16</sup> presented a number of calculation techniques, which involved analytical solutions of the boundary layer equations or of integral equations with the corresponding limiting conditions. Krall and Eckert<sup>17</sup>, Cebeci and Smith<sup>18</sup>, Lin et al.<sup>19</sup>, and Chun and Boehm<sup>20</sup> obtained various finite difference solutions for low Reynolds numbers. Žukauskas and Žiugžda<sup>10</sup> presented a semi-analytical solution for the boundary-layer equations in the laminar, transitional, and turbulent parts of the boundary layer,

taking into account the effects of free-stream turbulence, blockage factor, and Reynolds number on the heat transfer and fluid dynamics for a cylinder in cross flow. They found their results in good agreement with the results of Jones and Launder<sup>21</sup> and Karyakin and Sharov<sup>22</sup>.

Giedt<sup>23</sup>, Eckert and Soehngen<sup>15</sup>, Quarmby and Fakhri<sup>24</sup>, Refai Ahmed and Yovanovich<sup>25</sup> investigated experimentally the heat transfer from a circu-

lar cylinder under isothermal boundary condition. Krall and Eckert<sup>17,26</sup>, and Sarma and Sukhatme<sup>27</sup> studied experimentally/numerically the local heat transfer from a horizontal cylinder to air under isoflux boundary condition. A summary of experimental/analytical correlations for the heat transfer from an isolated single cylinder under isothermal and isoflux boundary conditions is given in Table 1.

**Table 1: Summary of Previous Experimental Correlations for Air (Pr = 0.71)**

Authors	Correlations/ Models			Conditions
Churchill and Bernstein <sup>33</sup>	$Nu_D = 0.3 + \frac{0.62Re_D^{1/2}Pr^{1/3}}{[1 + (0.4/Pr)^{2/3}]^{1/4}} \left[ 1 + \left( \frac{Re_D}{282000} \right)^{5/8} \right]^{4/5}$			Isothermal $Re_D Pr > 0.2$
	$Nu_D = CRe_D^n$			
	C	n	Re <sub>D</sub> Range	Boundary Condition
Žukauskas <sup>1</sup>	0.6607 0.4493 0.2290 0.0669	0.4 0.5 0.6 0.7	1 – 40 40 – $1 \times 10^3$ $1 \times 10^3$ – $2 \times 10^5$ $2 \times 10^5$ – $1 \times 10^6$	Isothermal
Morgan <sup>34</sup>	0.795 0.583 0.148 0.0208	0.384 0.471 0.633 0.814	4 – 40 40 – $4 \times 10^3$ $4 \times 10^3$ – $4 \times 10^4$ $4 \times 10^4$ – $4 \times 10^5$	Isothermal
Hilpert <sup>35</sup>	0.891 0.821 0.615 0.174 0.0239	0.33 0.385 0.466 0.618 0.805	1 – 4 4 – 40 40 – $4 \times 10^3$ $4 \times 10^3$ – $4 \times 10^4$ $4 \times 10^4$ – $4 \times 10^5$	Isothermal
Žukauskas and Žiugžda <sup>10</sup>	0.29	0.6	$1 \times 10^3$ – $2 \times 10^5$	Isoflux
Sarma and Sukhatme <sup>27</sup>	0.62	0.505	1200 – 4700	Isoflux

It is obvious from the literature survey that all experimental/analytical correlations are applicable over a fixed range of conditions. Furthermore, no analytical study gives a closed form solution for the fluid flow and heat transfer from a circular cylinder for a wide range of Reynolds and Prandtl numbers.

At most, they provide a solution at the front stagnation point or a solution of boundary layer equations for very low Reynolds numbers. In this study, a closed form solution is obtained for the drag coefficients and Nusselt number, which can be used for a wide range of parameters. For this purpose, the

Von Karman-Pohlhausen method is used, which was first introduced by Pohlhausen<sup>28</sup> at the suggestion of Von Karman<sup>29</sup> and then modified by Walz<sup>30</sup> and Holstein and Bohlen<sup>31</sup>. Schlichting<sup>5</sup> has explained and applied this method to the general problem of a two-dimensional boundary layer with pressure gradient. He obtained general solutions for the velocity profiles and the thermal boundary layers and compared them with the exact solution of a flat plate at zero incidence.

## ANALYSIS

Consider a uniform flow of a Newtonian fluid past a fixed circular cylinder of diameter  $D$ , with vanishing circulation around it, as shown in Figure 1. The approaching velocity of the air is  $U_\infty$  and the ambient temperature of the air is assumed to be  $T_\infty$ . The surface temperature of the wall is  $T_w (< T_\infty)$  in the case of the isothermal cylinder and the heat flux is  $q$  for the isoflux boundary condition. The flow is assumed to be laminar, steady, and two dimensional. Using order-of-magnitude analysis, the reduced equations of continuity, momentum and energy in the plane polar coordinates for an incompressible fluid can be written as:

**Continuity:**

$$\frac{\partial u_r}{\partial r} + \frac{u_r}{r} + \frac{1}{r} \frac{\partial u_\theta}{\partial \theta} = 0 \quad (1)$$

**$\theta$  - Momentum:**


$$u_r \frac{\partial u_\theta}{\partial r} + \frac{u_\theta}{r} \frac{\partial u_\theta}{\partial \theta} = -\frac{1}{r\rho} \frac{\partial p}{\partial \theta} + \nu \left\{ \frac{\partial^2 u_\theta}{\partial r^2} + \frac{1}{r} \frac{\partial u_\theta}{\partial r} - \frac{u_\theta}{r^2} \right\} \quad (2)$$

**$r$  - Momentum:**

$$\frac{\partial p}{\partial r} = 0 \quad (3)$$

**Energy:**

$$u_r \frac{\partial T}{\partial r} + \frac{u_\theta}{r} \frac{\partial T}{\partial \theta} = \alpha \left\{ \frac{\partial^2 T}{\partial r^2} + \frac{1}{r} \frac{\partial T}{\partial r} \right\} \quad (4)$$

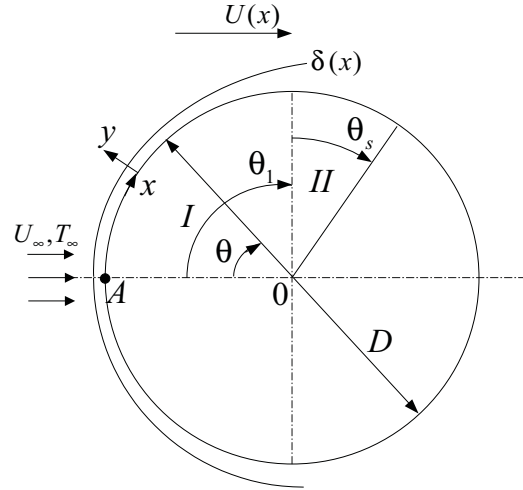

**Fig. 1 Flow over a circular cylinder**

These equations can be rewritten by adopting a curvilinear system of coordinates in which  $x$  denotes distance along the curved surface of the circular cylinder measured from the forward stagnation point  $A$  and  $y$  is the distance normal to and measured from the surface as shown in Fig. 1. In this system of coordinates, the velocity components  $u_\theta$  and  $u_r$  are replaced by  $u$  and  $v$  in the local  $x$ - and  $y$ - directions whereas  $r d\theta$  and  $dr$  are replaced by  $dx$  and  $dy$  respectively. The potential flow velocity just outside the boundary layer is denoted by  $U(x)$ . Therefore, the governing equations in this curvilinear system will be:

**Continuity:**

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (5)$$

**$x$ -Momentum:**

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{1}{\rho} \frac{dp}{dx} + \nu \frac{\partial^2 u}{\partial y^2} \quad (6)$$

**$y$ -Momentum:**

$$\frac{dp}{dy} = 0 \quad (7)$$

**Energy:**

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} \quad (8)$$

**Bernoulli Equation:**

$$-\frac{1}{\rho} \frac{dp}{dx} = U(x) \frac{dU(x)}{dx} \quad (9)$$

**Hydrodynamic Boundary Conditions**

At the cylinder surface, i.e., at  $y = 0$ :

$$u = 0 \quad \text{and} \quad \frac{\partial^2 u}{\partial y^2} = \frac{1}{\mu} \frac{\partial p}{\partial x} \quad (10)$$

At the edge of the boundary layer, i.e., at  $y = \delta(x)$ :

$$u = U(x), \quad \frac{\partial u}{\partial y} = 0 \quad \text{and} \quad \frac{\partial^2 u}{\partial y^2} = 0 \quad (11)$$

### Thermal Boundary Conditions

The boundary conditions for the uniform wall temperature (UWT) and uniform wall flux (UWF) are:

$$y = 0, \quad \begin{cases} T = T_w & \text{for UWT} \\ \frac{\partial T}{\partial y} = -\frac{q}{k_f} & \text{for UWF} \end{cases} \quad (12)$$

$$y = 0, \quad \frac{\partial^2 T}{\partial y^2} = 0 \quad (13)$$

$$y = \delta_T, \quad T = T_\infty \quad \text{and} \quad \frac{\partial T}{\partial y} = 0 \quad (14)$$

### Velocity Distribution

Assuming a thin boundary layer around the cylinder, the velocity distribution in the boundary layer can be approximated by a fourth order polynomial as suggested by Pohlhausen<sup>28</sup>:

$$\frac{u}{U(x)} = (2\eta - 2\eta^3 + \eta^4) + \frac{\lambda}{6}(\eta - 3\eta^2 + 3\eta^3 - \eta^4) \quad (15)$$

where  $0 \leq \eta = y/\delta(x) \leq 1$  and  $\lambda$  is the pressure gradient parameter, given by:

$$\lambda = \frac{\delta^2}{\nu} \frac{dU(x)}{dx} \quad (16)$$

With the help of velocity profiles, Schlichting<sup>5</sup> showed that the parameter  $\lambda$  is restricted to the range  $-12 \leq \lambda \leq 12$ .

### Temperature Distribution

Assuming a thin thermal boundary layer around the cylinder, the temperature distribution in the thermal boundary layer can be approximated by a third order polynomial:

$$\frac{T - T_\infty}{T_w - T_\infty} = A + B \eta_T + C \eta_T^2 + D \eta_T^3 \quad (17)$$

where  $\eta_T = y/\delta_T(x)$ . Using the above mentioned thermal boundary conditions, the temperature distribution will be:

$$\frac{T - T_\infty}{T_w - T_\infty} = 1 - \frac{3}{2} \eta_T + \frac{1}{2} \eta_T^3 \quad (18)$$

for the isothermal boundary condition and:

$$T - T_\infty = \frac{2q\delta_T}{3k_f} \left( 1 - \frac{3}{2} \eta_T + \frac{1}{2} \eta_T^3 \right) \quad (19)$$

for the isoflux boundary condition.

### Boundary-Layer Parameters

In dimensionless form, the momentum integral equation can be written as:

$$\frac{U \delta_2}{\nu} \frac{d\delta_2}{dx} + \left( 2 + \frac{\delta_1}{\delta_2} \right) \frac{\delta_2^2}{\nu} \frac{dU}{dx} = \frac{\delta_2}{U} \frac{\partial u}{\partial y} \Big|_{y=0} \quad (20)$$

where

$$\delta_1 = \delta \int_0^1 \left[ 1 - \frac{u}{U(x)} \right] d\eta \quad (21)$$

and

$$\delta_2 = \delta \int_0^1 \frac{u}{U(x)} \left[ 1 - \frac{u}{U(x)} \right] d\eta \quad (22)$$

Using velocity distribution from Eq. (15), Eqs. (21) and (22) can be written as:

$$\delta_1 = \frac{\delta}{10} \left( 3 - \frac{\lambda}{12} \right) \quad (23)$$

and

$$\delta_2 = \frac{\delta}{63} \left( \frac{37}{5} - \frac{\lambda}{15} - \frac{\lambda^2}{144} \right) \quad (24)$$

Assuming

$$Z = \frac{\delta_2^2}{\nu} \quad \text{and} \quad K = Z \frac{dU}{dx}$$

Equation (20) can be reduced to a non-linear differential equation of the first order for  $Z$ , which is given by:

$$\frac{dZ}{dx} = \frac{H(K)}{U} \quad (25)$$

where  $H(K) = 2f_2(K) - 2K[2 + f_1(K)]$  is a universal function and is approximated by Walz<sup>30</sup> by a straight line:

$$H(K) = 0.47 - 6K \quad (26)$$

with

$$f_1(K) = \frac{63(3 - \lambda/12)}{10(37/5 - \lambda/15 - \lambda^2/144)} \quad (27)$$

$$f_2(K) = \frac{1}{63} \left( 2 + \frac{\lambda}{6} \right) \left( \frac{37}{5} - \frac{\lambda}{15} - \frac{\lambda^2}{144} \right) \quad (28)$$

and

$$K = \frac{\lambda}{3963} \left( \frac{37}{5} - \frac{\lambda}{15} - \frac{\lambda^2}{144} \right)^2 \quad (29)$$

Solving Eq. (25) with Eq. (26), the local dimensionless momentum thickness can be written as:

$$\frac{\delta_2}{D} = \frac{0.3428}{\sqrt{Re_D}} \sqrt{\frac{1}{\sin^6 \theta} \int_0^\theta \sin^5 \zeta d\zeta} \quad (30)$$

This equation was solved numerically by using MAPLE 7, a symbolic mathematics software. From Eq. (16), the local dimensionless boundary layer thickness can be written as:

$$\frac{\delta}{D} = \sqrt{\frac{\lambda}{4 Re_D \cos \theta}} \quad (31)$$

By solving Eqs. (24) and (31) and comparing the results with Eq. (30), the values of the pressure gradient parameter  $\lambda$  are obtained corresponding to

each position along the cylinder surface. These values are positive in region I from  $0 \leq \theta \leq \theta_1 = 90^\circ$  and negative in region II from  $\theta_1 \leq \theta \leq \theta_s = 107.71^\circ$  (Fig.1). So the whole range of interest  $0 \leq \theta \leq \theta_s$  can be divided into two regions and the  $\lambda$  values can be fitted separately by the least squares method into two polynomials, i.e., for region I:

$$\lambda_1 = 7.239 \sum_{j=0}^7 a_j \theta^j \quad (32)$$

and for region II:

$$\lambda_2 = 0.3259 \sum_{j=0}^{10} b_j \theta^j \quad (33)$$

where  $a_j$  and  $b_j$  are the coefficients given in Table 2. These polynomials will be used to determine the drag and the local heat transfer coefficients in both regions.

**Table 2: Coefficients Used in Eqs. (32) and (33)**

j	0	1	2	3	4	5
$a_j$	1.000	-0.0053	-0.1344	-0.2998	0.6335	-0.7937
$b_j$	-2521.735	2834.998	-219.186	-262.703	109.967	-349.374

j	6	7	8	9	10
$a_j$	0.4583	-0.1123	-	-	-
$b_j$	131.419	-7.360	43.564	-21.629	1.564

## Fluid Flow

The first parameter of interest is fluid friction which manifests itself in the form of the drag force  $F_D$ , where  $F_D$  is the sum of the skin friction drag  $D_f$  and pressure drag  $D_p$ . Skin friction drag is due to viscous shear forces produced at the cylinder surface predominantly in those regions where the boundary layer is attached. The component of shear force in the flow direction is given by

$$D_f = \int_A \tau_w \frac{D}{2} \sin \theta d\theta \quad (34)$$

where  $\tau_w$  is the shear stress along the cylinder wall

and it can be determined from Newton's law of viscosity:

$$\tau_w = \mu \left. \frac{\partial u}{\partial y} \right|_{y=0} \quad (35)$$

In dimensionless form, it can be written as:

$$C_f = \frac{\tau_w}{\frac{1}{2} \rho U_\infty^2} = \frac{4}{3} \frac{\lambda + 12}{\sqrt{Re_D}} \sin \theta \sqrt{\frac{\cos \theta}{\lambda}} \quad (36)$$

The friction drag coefficient can be defined as:

$$\begin{aligned} C_{Df} &= \int_0^\pi C_f \sin \theta d\theta \\ &= \int_0^{\theta_s} C_f \sin \theta d\theta + \int_{\theta_s}^\pi C_f \sin \theta d\theta \end{aligned} \quad (37)$$

Since no shear stress acts on the cylinder surface after boundary layer separation, therefore, the second integral will be zero and the friction drag coefficient can be written as:

$$\begin{aligned}
C_{Df} &= \int_0^{\theta_s} C_f \sin \theta \, d\theta \\
&= \frac{4}{3\sqrt{Re_D}} \left\{ \int_0^{\theta_1} (\lambda_1 + 12) \sin^2 \theta \sqrt{\frac{\cos \theta}{\lambda_1}} \, d\theta \right. \\
&\quad \left. + \int_{\theta_1}^{\theta_s} (\lambda_2 + 12) \sin^2 \theta \sqrt{\frac{\cos \theta}{\lambda_2}} \, d\theta \right\} \\
&= \frac{5.784}{\sqrt{Re_D}} \quad (38)
\end{aligned}$$

Pressure drag is due to the unbalanced pressures which exist between the relatively high pressures on the upstream surfaces and the lower pressures on the downstream surfaces. The component of pressure force in the flow direction is given by

$$D_p = \int_A p \frac{D}{2} \cos \theta \, d\theta \quad (39)$$

In dimensionless form, it can be written as:

$$C_{Dp} = \int_0^\pi C_p \cos \theta \, d\theta \quad (40)$$

where  $C_p$  is the pressure coefficient and can be defined as:

$$C_p = \frac{\Delta p}{\frac{1}{2}\rho U_\infty^2} \quad (41)$$

The pressure difference  $\Delta p$  can be obtained by integrating Eq. (2) w.r.t.  $\theta$ . In dimensionless form, it can be written as:

$$\frac{\Delta p}{\frac{1}{2}\rho U_\infty^2} = 2(1 - \cos \theta) + \frac{8}{Re_D}(1 - \cos \theta) \quad (42)$$

So, the pressure drag coefficient for the cylinder up to the separation point will be:

$$\begin{aligned}
C_{Dp} &= \int_0^{\theta_s} C_p \cos \theta \, d\theta \\
&= 1.152 + \frac{1.260}{Re_D} \quad (43)
\end{aligned}$$

The total drag coefficient  $C_D$  can be written as the sum of both drag coefficients:

$$C_D = \frac{5.784}{\sqrt{Re_D}} + 1.152 + \frac{1.260}{Re_D} \quad (44)$$

## Heat Transfer

The second parameter of interest in this study is the dimensionless average heat transfer coefficient,  $Nu_D$  for large Prandtl numbers. This parameter is determined by integrating Eq. (8) from the cylinder surface to the thermal boundary layer edge. Assuming the presence of a thin thermal boundary layer  $\delta_T$  along the cylinder surface, the energy integral equation for the isothermal boundary condition can be written as:

$$\frac{d}{dx} \int_0^{\delta_T} (T - T_\infty) u \, dy = -\alpha \left. \frac{\partial T}{\partial y} \right|_{y=0} \quad (45)$$

Using velocity and temperature profiles, and assuming  $\zeta = \delta_T/\delta < 1$ , Eq. (45) can be simplified to:

$$\delta_T \frac{d}{dx} [U(x)\delta_T \zeta(\lambda + 12)] = 90\alpha \quad (46)$$

This equation can be rewritten separately for the above mentioned two regions, i.e.:

$$\delta_T \frac{d}{dx} [U(x)\delta_T \zeta(\lambda_1 + 12)] = 90\alpha \quad (47)$$

for the region I, and:

$$\delta_T \frac{d}{dx} [U(x)\delta_T \zeta(\lambda_2 + 12)] = 90\alpha \quad (48)$$

for the region II. Multiplying both equations by  $U(x)\zeta$  and integrating separately in the two regions with respect to  $x$ , one can solve these two equations for the local thermal boundary layer thicknesses:

$$\frac{\delta_{T_1}}{D} = \frac{1}{Re_D^{1/2} Pr^{1/3}} \sqrt[3]{\frac{22.5 f_1(\theta)}{(\lambda_1 + 12)^2 \sin^2 \theta}} \sqrt{\frac{\lambda_1}{\cos \theta}} \quad (49)$$

and

$$\frac{\delta_{T_2}}{D} = \frac{1}{Re_D^{1/2} Pr^{1/3}} \sqrt[3]{\frac{22.5 f_3(\theta)}{\sin^2 \theta}} \sqrt{\frac{\lambda_2}{\cos \theta}} \quad (50)$$

where  $\delta_{T_1}$  and  $\delta_{T_2}$  are the thicknesses of the thermal boundary layers in the two respective regions and the functions  $f_1(\theta)$  and  $f_3(\theta)$  are given by:

$$f_1(\theta) = \int_0^\theta \sin \theta (\lambda_1 + 12) \, d\theta \quad (51)$$

and

$$f_3(\theta) = \frac{f_1(\theta)}{\lambda_1 + 12} + \frac{f_2(\theta)}{\lambda_2 + 12} \quad (52)$$



with

$$f_2(\theta) = \int_{\theta_1}^{\theta_s} \sin \theta (\lambda_2 + 12) d\theta \quad (53)$$

For the isothermal boundary condition, the local heat transfer coefficient can be defined as follows:

$$\begin{aligned} h(\theta) &= -\frac{k_f \left. \frac{\partial T}{\partial y} \right|_{y=0}}{T_w - T_\infty} \\ &= \frac{3k_f}{2\delta_T} \end{aligned} \quad (54)$$

So, the local heat transfer coefficients for both the regions can be written as:

$$h_1(\theta) = \frac{3k_f}{2\delta_{T_1}} \quad \text{and} \quad h_2(\theta) = \frac{3k_f}{2\delta_{T_2}} \quad (55)$$

The average heat transfer coefficient can be defined as:

$$\begin{aligned} \bar{h} &= \frac{1}{\pi} \int_0^\pi h(\theta) d\theta \\ &= \frac{1}{\pi} \left\{ \int_0^{\theta_s} h(\theta) d\theta + \int_{\theta_s}^\pi h(\theta) d\theta \right\} \end{aligned} \quad (56)$$

It has been observed experimentally by many researchers that, at low Reynolds numbers (up to  $Re_D = 5000$ , according to Žukauskas and Žiugžda<sup>10</sup>), there is no appreciable increase in the local heat transfer after separation point. However, at high Reynolds numbers, the local heat transfer increases from the separation point to the rear stagnation point but the effects of this increase on the average heat transfer are observed to be smaller and they could be reduced further if the free stream turbulence and the blockage effects were included in the analysis. Hence, the average heat transfer coefficient can be written as:

$$\begin{aligned} \bar{h} &= \frac{1}{\pi} \int_0^{\theta_s} h(\theta) d\theta \\ &= \frac{1}{\pi} \left\{ \int_0^{\theta_1} h_1(\theta) d\theta + \int_{\theta_1}^{\theta_s} h_2(\theta) d\theta \right\} \end{aligned} \quad (57)$$

Using Eqs. (49) - (55), Eq. (57) can be solved for the average heat transfer coefficient which gives the average Nusselt number for an isothermal cylinder:

$$Nu_D|_{isothermal} = 0.5930 Re_D^{1/2} Pr^{1/3} \quad (58)$$

For the isoflux boundary condition, the energy integral equation can be written as:

$$\frac{d}{dx} \int_0^{\delta_T} (T - T_\infty) u dy = \frac{q}{\rho c_p} \quad (59)$$

For constant heat flux and thermophysical properties, Eq. (59) can be simplified to:

$$\frac{d}{dx} [U(x) \delta_T^2 \zeta(\lambda + 12)] = 90 \frac{\nu}{Pr} \quad (60)$$

Rewriting Eq. (60) for the two regions in the same way as Eq. (46), one can obtain local thermal boundary layer thicknesses  $\delta_{T_1}$  and  $\delta_{T_2}$  under isoflux boundary condition. The local surface temperatures for the two regions can then be obtained from Eq. (19):

$$\Delta T_1(\theta) = \frac{2q\delta_{T_1}}{3k_f} \quad (61)$$

and

$$\Delta T_2(\theta) = \frac{2q\delta_{T_2}}{3k_f} \quad (62)$$

The local heat transfer coefficient can now be obtained from its definition as:

$$h_1(\theta) = \frac{q}{\Delta T_1(\theta)} \quad \text{and} \quad h_2(\theta) = \frac{q}{\Delta T_2(\theta)} \quad (63)$$

Following the same procedure for the average heat transfer coefficient as mentioned above, one can obtain the average Nusselt number for an isoflux cylinder as:

$$Nu_D|_{isoflux} = 0.6321 Re_D^{1/2} Pr^{1/3} \quad (64)$$

This Nusselt number is 6% greater than the average Nusselt number for an isothermal cylinder. Combining the results for both thermal boundary conditions, we have

$$\frac{Nu_D}{Re_D^{1/2} Pr^{1/3}} = \begin{cases} 0.5930 & \text{for UWT} \\ 0.6321 & \text{for UWF} \end{cases} \quad (65)$$

## RESULTS AND DISCUSSION

### Flow Characteristics

The dimensionless local shear stress,  $C_f \sqrt{Re_D}$ , is plotted in Fig. 2. It shows that  $C_f$  is zero at the stagnation point and reaches a maximum at  $\theta \approx 60^\circ$ . The increase in shear stress is caused by the deformation of the velocity profiles in the boundary

layer, a higher velocity gradient at the wall and a thicker boundary layer. In the region of decreasing  $C_f$  preceding the separation point, the pressure gradient decreases further and finally  $C_f$  falls to zero at  $\theta = 107.7^\circ$ , where boundary-layer separation occurs. Beyond this point,  $C_f$  remains close to zero up to the rear stagnation point. These results are compared with the experimental results of Žukauskas and Žiugžda<sup>10</sup>.

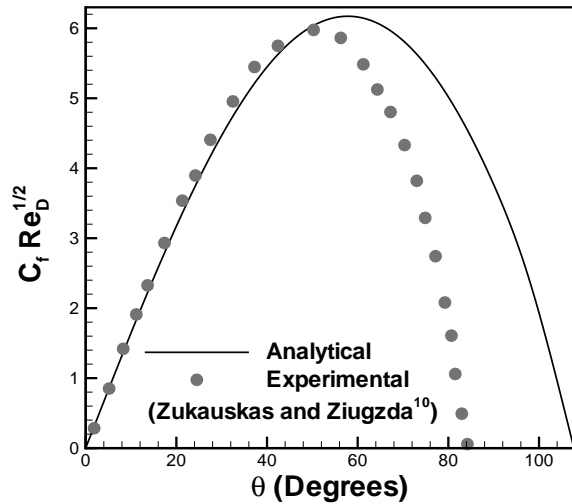


Fig. 2 Distribution of Shear Stress on a Circular Cylinder in Air

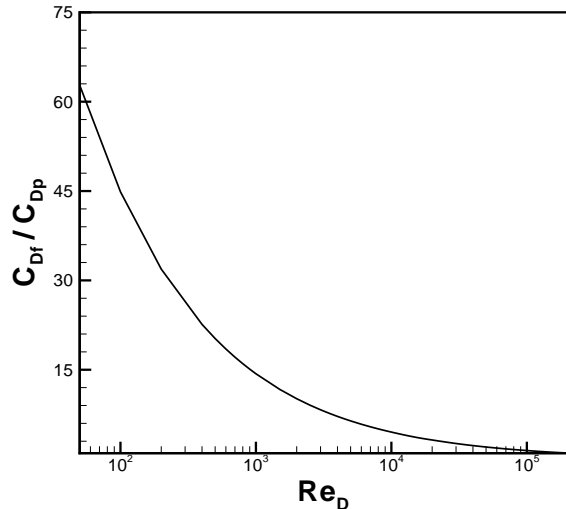


Fig. 3 Contribution of Friction Drag to Pressure Drag as a Function of  $Re_D$

Equations (38) and (43) show the effects of Reynolds number on the friction and pressure drag. At low Reynolds number the pressure drag is in-

significant and is proportional to  $1/Re_D$ , but at high Reynolds numbers it is independent of  $Re_D$ . The contribution of the friction drag to the pressure drag was found to be in the range 50 to 2% for  $Re_D$  from 30 to  $10^4$  by Goldstein<sup>32</sup>, 3 to 1% for  $Re_D$  from  $5 \times 10^3$  to  $10^6$  by Žukauskas and Žiugžda<sup>10</sup>. Figure 3 shows similar results of the contribution of the friction drag to the pressure drag obtained in the present analysis.

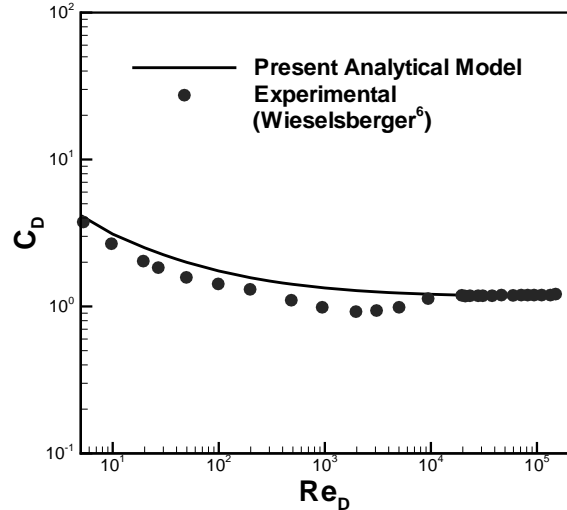


Fig. 4 Drag Coefficient as a function of  $Re_D$  for a Circular Cylinder

The variation of the total drag coefficient  $C_D$  with  $Re_D$  is illustrated in Fig. 4 for an infinite cylinder. The present results are compared with the experimental results of Wieselsberger<sup>6</sup>. It is clear that the present results are in good agreement except at  $Re_D = 2 \times 10^3$ , where a downward deviation (23.75%) in the experimental results was noticed. No physical explanation could be found in the literature for this deviation.

### Heat Transfer Characteristics

The comparison of local Nusselt Numbers for the isothermal and isoflux boundary conditions is presented in Fig. 5. The isoflux boundary condition gives a higher heat transfer coefficient over the larger part of the circumference. On the front part of the cylinder (up to  $\theta \approx 30^\circ$ ), there is no appreciable effect of boundary condition. Higher heat transfer coefficients have also been observed numerically by Krall and Eckert<sup>17</sup> and Chun and Boehm<sup>20</sup> and ex-

perimentally by Žukauskas and Žiugžda<sup>10</sup> with the isoflux boundary condition.

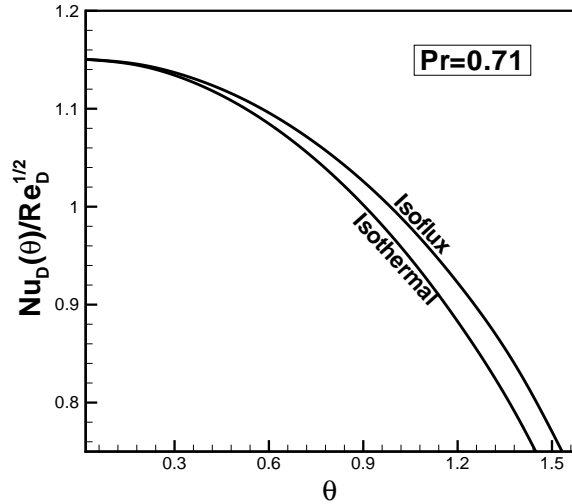


Fig. 5 Local Nusselt Numbers for different Boundary Conditions

The results of heat transfer from a single isothermal cylinder are shown in Fig. 6, where they are compared with the correlations of Churchill and Bernstein<sup>33</sup>, Žukauskas<sup>1</sup>, Morgan<sup>34</sup>, and of Hilpert<sup>35</sup>. It shows that the previous correlations are

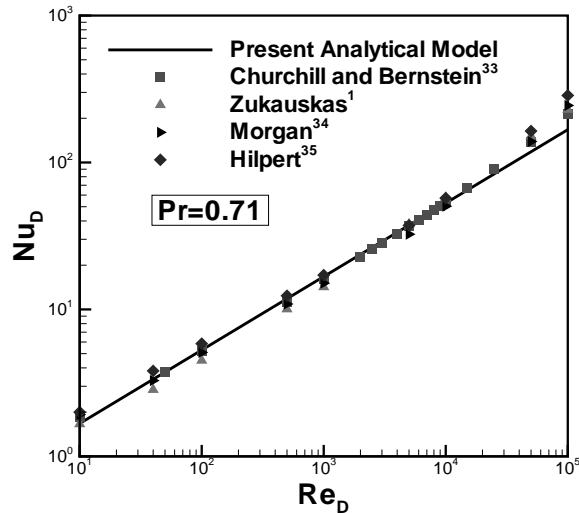


Fig. 6 Variation of Average Nusselt Number with Reynolds Number for Isothermal Boundary Condition

in very good agreement with the present correlation for  $40 < Re_D < 4 \times 10^4$ . Beyond this range, the discrepancy increases as the Reynolds number increases. This discrepancy could be the effect of free-

stream turbulence or vortex shedding in actual experiments. It was demonstrated by Kestin<sup>36</sup>, Smith and Kuethe<sup>37</sup>, Dyban and Epick<sup>38</sup>, and Kestin and Wood<sup>39</sup> that the heat transfer coefficient increases with turbulence intensity and that this effect is more intense when the Reynolds number is higher. In the present analysis these effects are not included, so the discrepancy can be observed clearly in Fig. 6 for higher Reynolds numbers.

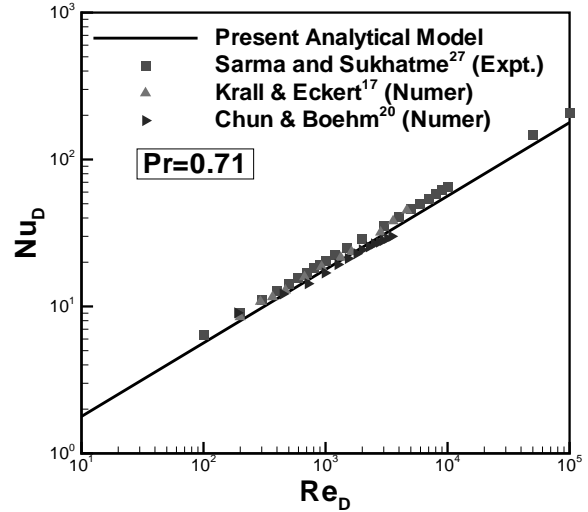


Fig. 7 Variation of Average Nusselt Number with Reynolds Number for Isoflux Boundary Condition

Average Nusselt numbers for the isoflux boundary condition are compared in Fig. 7 with the experimental/numerical results. The average  $Nu_D$  values are found to be in a good agreement with both numerical results of Krall and Eckert<sup>17</sup> and Chun and Boehm<sup>20</sup>. However, the experimental results of Sarma and Sukhatme<sup>27</sup> are found to be higher ( $\approx 5\%$ ).

## SUMMARY

The Von Karman-Pohlhausen method was used to investigate the fluid flow and heat transfer from a circular cylinder. Three correlations are obtained, Eq. (44) for total drag coefficient, Eq. (58) for heat transfer from an isothermal cylinder, and Eq. (64) for heat transfer from a cylinder under isoflux boundary condition.

The present results indicate good agreement with

the experimental results for the full laminar range of Reynolds numbers in the absence of free stream turbulence and blockage effects. However, a downward deviation was noticed in the experimental drag curve at  $Re_D = 2000$  and the effects of free stream turbulence were noticed in heat transfer results for high Reynolds numbers. These correlations can be used to determine the drag coefficient and the dimensionless heat transfer coefficient from a pin fin.

## REFERENCES

- <sup>1</sup> Žukauskas, A., 1972, "Advances in Heat Transfer," Academic Press, New York, pp. 93-160.
- <sup>2</sup> Lamb, H., 1957, Hydrodynamics, 6th Edition, Dover, Cambridge.
- <sup>3</sup> Roshko, A., 1961, "Experiments on the Flow Past Circular Cylinders at Very High Reynolds Number," Journal of Fluid Mechanics, Vol. 10, No. 3, pp. 345-356.
- <sup>4</sup> Achenbach, E., 1975, "Total and Local Heat Transfer From a Smooth Circular Cylinder in Cross Flow at High Reynolds Number," International Journal of Heat and Mass Transfer, Vol. 18, pp. 1387-1396.
- <sup>5</sup> Schlichting, H., 1979, Boundary Layer Theory, 7th Edition., McGraw-Hill, New York.
- <sup>6</sup> Wieselsberger, C., 1921, "New Data on The Laws of Fluid Resistance," NACA TN No. 84.
- <sup>7</sup> Flachsbart, O., 1932, "Winddruck auf Gasbehälter," Reports of the AVA in Göttingen, IVth Series, pp. 461-469.
- <sup>8</sup> Churchill, S. W., 1988, Viscous Flows: The Practical Use of Theory, Butterworths Series in Chemical Engineering, USA, pp. 317-358.
- <sup>9</sup> Sucker, D. and Brauer, H., 1995, "Investigation of the Flow Around Transverse Cylinders," Wärme-und Stoffübertragung, Vol. 8, pp. 149-158.
- <sup>10</sup> Žukauskas, A. and Žiugžda, J., 1985, Heat Transfer of a Cylinder in Crossflow, Hemisphere Publishing Corporation, New York.
- <sup>11</sup> Kruzhilin, G. N., 1936, "A Theory of Heat Transfer for a Circular Cylinder in Cross Flow," Zh. Tekhnicheskoi Fiziki, Vol. 6, No. 5, pp. 858-865.
- <sup>12</sup> Frössling, N., 1940, "Verdunstung, Wärmeübergang und Geschwindigkeitsverteilung bei zweidimensionaler und rotationsymmetrischer Grenzschichtströmung," Lunds Univ. Arssk. N. F. Avd. 2, Vol. 36, No. 4, pp. 25-35.
- <sup>13</sup> Eckert, E. R. G., 1942, "Die Berechnung des Wärmeüberganges in der laminaren Grenzschicht umströmter Körper," VDI-Forschungsheft, Vol. 416, pp. 1-26.
- <sup>14</sup> Drake, R. M., Sauer, F. M., and Schaaf, S. A., 1950, "Forced Convection Heat Transfer from Cylinders and Spheres in a Rarefied Gas," Technical Report No. HE-150-74 NACA, University of California, Institute of Engineering Research, Berkeley California.
- <sup>15</sup> Eckert, E. R. G. and Soehngen, E., 1952, "Distribution of Heat-Transfer Coefficients Around Circular Cylinders in Cross Flow at Reynolds Numbers from 20 to 500," Transactions of the ASME, Vol. 74, pp. 343-347.
- <sup>16</sup> Refai-Ahmed, G. and Yovanovich, M. M., 1995, "Analytical Method for Forced Convection from Flat Plates, Circular Cylinders, and Spheres," Journal of Thermophysics and Heat Transfer, Vol. 9, No. 3, pp. 516-523.
- <sup>17</sup> Krall, K. M. and Eckert, E. R. G., 1970, "Heat Transfer to a Transverse Circular Cylinder at Low Reynolds Number Including Refraction Effects," Heat Transfer, Vol. 3, pp. 225-232.
- <sup>18</sup> Cebeci, T. and Smith, A. M. O., 1974, Analysis of Turbulent Boundary Layer, New York, Academic Press.
- <sup>19</sup> Lin, C. J., Pepper, D. W., and Lee, S. C., "Turbulent Heat Transfer at Low Reynolds Number," AIAA Journal, Vol. 14, No.7, pp. 581-590.
- <sup>20</sup> Chun, W. and Boehm, R. F., 1989, "Calculation of Forced Flow and Heat Transfer Around a Cylinder in Cross Flow," Numerical Heat Transfer, Vol. 15, pp. 101-122.
- <sup>21</sup> Jones, W. P. and Launder, B. E., 1973, "The Calculations of Low Reynolds Number Phenomena with a Two-Equation Model of Turbulence," Journal of Heat Transfer, Vol. 16, No. 6, pp. 1119-1130.

- <sup>22</sup> Karyakin, Y. E. and Sharov, V. T., 1974, "A Finite Difference Technique of Determining the Turbulent Boundary Layer of an Incompressible Liquid," *Inzhenerno-Fizicheskii Zh.*, Vol. 26, No. 2, pp. 191-198.
- <sup>23</sup> Giedt, W. H., 1949, "Investigation of Variation of Point Unit Heat-Transfer Coefficient Around a Cylinder Normal to an Air Stream," *Transactions of the ASME*, Vol. 71, pp. 375-381.
- <sup>24</sup> Quarmby, A. and Al-Fakhri, A. A. M., 1980, "Effect of Finite Length On Forced Convection Heat Transfer From Cylinders," *International Journal of Heat and Mass Transfer*, Vol. 23, pp. 463-469.
- <sup>25</sup> Refai-Ahmed, G. and Yovanovich, M. M., 1997, "Experimental Study of Forced Convection from Isothermal Circular and Square Cylinders, and Toroids," *Journal of Heat Transfer*, Vol. 119, February, pp. 70-79.
- <sup>26</sup> Krall, K. M. and Eckert, E. R. G., 1973, "Local Heat Transfer Around a Cylinder at Low Reynolds Number," *Journal of Heat Transfer*, Vol. 95, No. 2, pp. 273-275.
- <sup>27</sup> Sarma, T. S. and Sukhatme, S. P., 1977, "Local Heat Transfer from a Horizontal Cylinder to Air in Cross Flow: Influence of Free Convection and Free Stream Turbulence," *International Journal of Heat and Mass Transfer*, Vol. 20, pp. 51-56.
- <sup>28</sup> Pohlhausen, K., 1921, "Zur Näherungsweise Integration der Differential Gleichung der Laminaren Reibungsschicht," *Zeitschrift für angewandte Mathematic und Mechanic*, Vol. 1, pp. 252-268.
- <sup>29</sup> Von Karman, T., 1921, "Über Laminar Und Turbulente Reibung," *Zeitschrift für angewandte Mathematic Und Mechanic*, Vol. 1, pp. 233-252.
- <sup>30</sup> Walz, A., 1941, "Ein neuer Ansatz für das Geschwindigkeitsprofil der laminaren Reibungsschicht," *Lilienthal-Bericht* 141, p. 8.
- <sup>31</sup> Holstein, H. and Bohlen, T., 1950, "Ein einfaches Verfahren zur Berechnung Laminaren Reibungsschichten," die dem Nahenungsansatz von K. Pohlhausen genügen, *Lilienthal Bericht* 510, p. 5.
- <sup>32</sup> Goldstein, S., 1965, *Modern Developments in Fluid Dynamics*, Vol. 2, Dover, New York.
- <sup>33</sup> Churchill, S. W. and Bernstein, M., 1977, "A Correlating Equation for Forced Convection from Gases and Liquids to a Circular Cylinder in Cross flow," *Journal of Heat Transfer*, Vol. 99, No. 2, pp. 300-306.
- <sup>34</sup> Morgan, V. T., 1975, "The Overall Convective Heat Transfer from Smooth Circular Cylinders," *Advances in Heat Transfer*, Vol. 11, Academic Press, New York, pp. 199-264.
- <sup>35</sup> Hilpert, R., 1933, "Wärmeabgabe von geheizten Drahten und Rohren," *Forsch. Geb. Ingenieurwes*, Vol. 4, pp. 215-224.
- <sup>36</sup> Kestin, J., 1966, "The Effect of Free Stream Turbulence on Heat Transfer Rates," *Advances in Heat Transfer*, Vol. 3, Academic Press, New York, pp. 1-32.
- <sup>37</sup> Smith, M. C. and Kuethe, A. M., 1966, "Effects of Turbulence on Laminar Skin Friction and Heat Transfer," *Physics of Fluids*, Vol. 9, No. 12, pp. 2337-2344. *Advances in Heat Transfer*, Vol. 3, Academic Press, New York, pp. 1-32.
- <sup>38</sup> Dyban, E. P. and Epick, E. Ya., 1970, "Some Heat Transfer Features in the Air Flows of Intensified Turbulence," *Proceedings of 4th Heat Transfer Conference*, F. C. 5.7, Part 2, Paris-Versailles.
- <sup>39</sup> Kestin, J. and Wood, R. T., 1971, "The Influence of Turbulence on Mass Transfer from Cylinders," *Advances in Heat Transfer*, Vol. 3, Academic Press, New York, pp. 1-32.