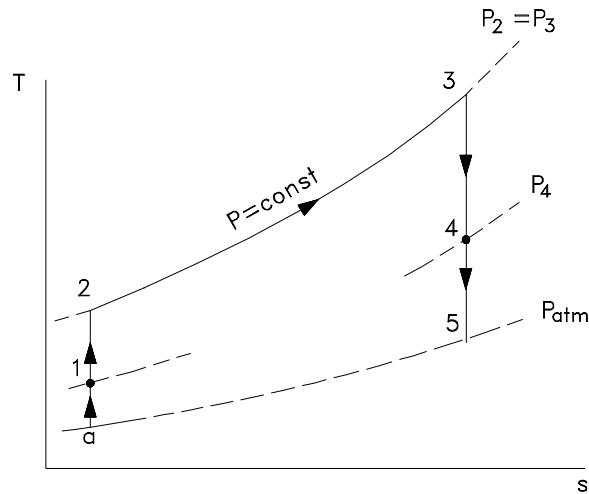


## Week 9: Lecture 2

## Turbojet

• **a-1**: diffuser

- decelerates the incoming flow relative to the engine
- a pressure rise known as a ram effect occurs


• **1-4**: gas generator

- compressor, combustor and turbine
- turbine power just enough to drive the compressor
- air and fuel are mixed and burned in the combustion chamber at constant pressure
- $P_T >> P_{atm}$

• **4-5**: nozzle

- gases leave the turbine significantly higher in pressure than atmospheric pressure
- gases are expanded to produce a high velocity
- $v_e^* >> v_i^*$
- results in a thrust

## Afterburner

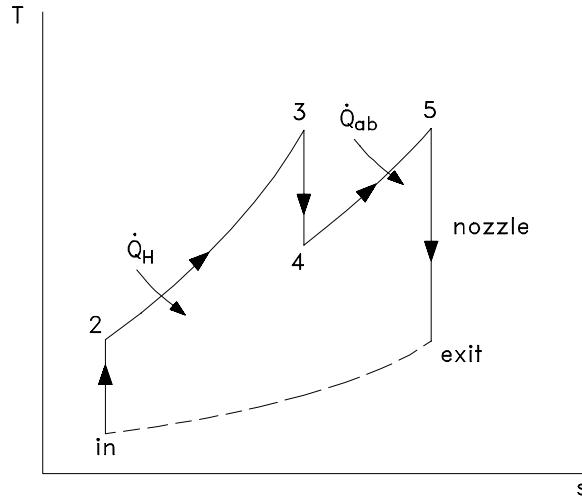

By performing a 1st law energy over the nozzle we can obtain an expression for the exit velocity in terms of the entrance temperature to the nozzle.

$$\frac{dE^0}{dt} = \dot{Q}^0 + \dot{W}^0 \left\{ \dot{m} \left[ h_4 + \frac{(v_4^*)^2}{2} \right] \right\} - \left\{ \dot{m} \left[ h_e + \frac{(v_e^*)^2}{2} \right] \right\}$$

If we assume that the air velocity leaving the turbine is relatively small, the kinetic energy term at 4 can be assumed to go to zero and we get

$$v_e^* = \sqrt{2(h_4 - h_e)}$$

$$= \sqrt{2c_p(T_4 - T_e)}$$

- exit velocity proportional to  $v_e^* \propto \sqrt{2c_p(T_4 - T_e)}$
- afterburner is used to increase  $T_4$  to  $T_5$
- similar to a reheat device
- produces a higher temperature at the nozzle inlet