
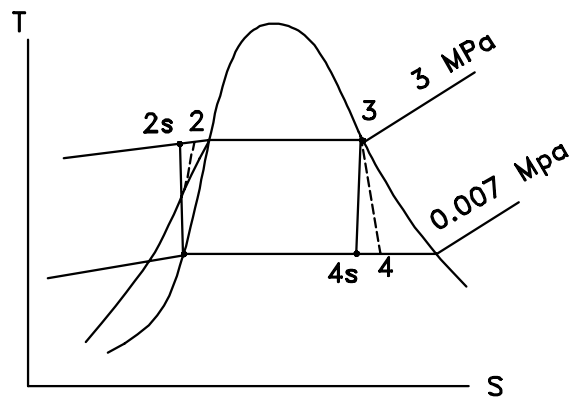


Problem: 9-21

Given: Simple Rankine cycle with saturated liquid at 0.007 MPa at pump inlet.
 Saturated vapour at 3 MPa at turbine inlet
 Pump efficiency: 60%
 Turbine efficiency: 80%

Find: The overall thermal efficiency

Assume: Incompressible at state 1

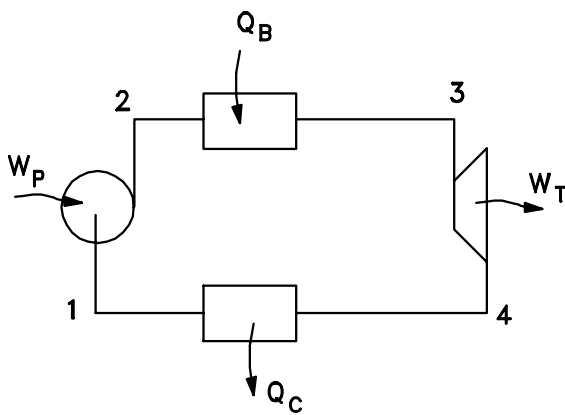

1 → 2

From steam tables:

$$h_1 = 162.7 \text{ kJ/kg}$$

$$\nu_1 = 0.001007 \text{ m}^3/\text{kg}$$

$$h_{2s} = h_1 + \nu(P_2 - P_1)$$

$$w_{ps} = h_{2s} - h_1$$

$$= \nu(P_2 - P_1)$$

$$= (0.001007 \text{ m}^3/\text{kg})(3000 - 7) \text{ kN/m}^2$$

$$= 3.01 \text{ kJ/kg}$$

$$w_p = \frac{w_{ps}}{\eta_s} = \frac{3.01 \text{ kJ/kg}}{0.6} = 5.02 \text{ kJ/kg}$$

$$h_2 = h_1 + w_p = 162.7 + 5.02 = 167.7 \text{ kJ/kg}$$

2 → 3

From steam tables

$$h_3 = 2804.1 \text{ kJ/kg}$$

$$s_3 = 6.1878 \text{ kJ/kg} \cdot \text{K}$$

$$q_B = h_3 - h_2 = 2904.1 - 167.7 = 2636.4 \text{ kJ/kg}$$

3 → 4

consider isotropic case

$$s_{4s} = s_3 = 6.1878 \text{ kJ/kg} \cdot \text{K}$$

$$p_4 = 0.007 \text{ MPa}$$

find quality

$$x = \frac{s_{4s} - s_{f4s}}{s_{g4s} - s_{f4s}} = 0.729$$

from quality $h_{4s} = 1919.4 \text{ kJ/kg}$

$$w_{T_s} = h_3 - h_{4s} = 2304.1 - 1919.4 = 884.7 \text{ kJ/kg}$$

$$w_T = \eta_s w_{T_s} = 0.8(884.7) = 707.8 \text{ kJ/kg}$$

Overall

$$\begin{aligned} \eta_T &= \frac{w_T - w_p}{q_B} \\ &= \frac{707.8 - 5.02}{2636.4} \\ &= \boxed{26.7\%} \end{aligned}$$