
12-41 Wind is blowing parallel to the wall of a house. The rate of heat loss from that wall is to be determined for two cases.

Assumptions **1** Steady operating conditions exist. **2** The critical Reynolds number is $\text{Re}_{cr} = 5\times10^5$. **3** Radiation effects are negligible. **4** Air is an ideal gas with constant properties.

Properties The properties of air at 1 atm and the film temperature of $(T_s + T_\infty)/2 = (12+5)/2 = 8.5°\text{C}$ are (Table A-22)

$$k = 0.02428\ \text{W/m}\cdot°\text{C}$$
$$\nu = 1.413\times10^{-5}\ \text{m}^2/\text{s}$$
$$\text{Pr} = 0.7340$$

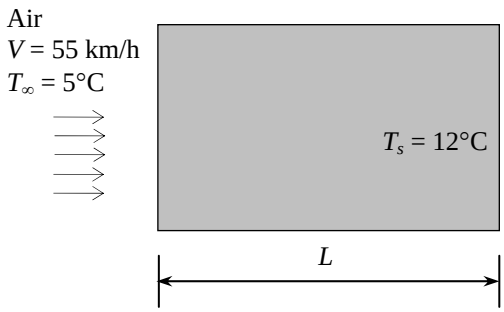

Analysis *Air flows parallel to the 10 m side*:

The Reynolds number in this case is

$$\text{Re}_L = \frac{VL}{\nu} = \frac{[(55\times1000/3600)\text{m/s}](10\ \text{m})}{1.413\times10^{-5}\ \text{m}^2/\text{s}} = 1.081\times10^7$$

which is greater than the critical Reynolds number. Thus we have combined laminar and turbulent flow. Using the proper relation for Nusselt number, heat transfer coefficient and then heat transfer rate are determined to be

$$Nu = \frac{hL}{k} = (0.037\,\text{Re}_L^{\,0.8} - 871)\,\text{Pr}^{1/3} = [0.037(1.081\times10^7)^{0.8} - 871](0.7340)^{1/3} = 1.336\times10^4$$

$$h = \frac{k}{L}Nu = \frac{0.02428\ \text{W/m.°C}}{10\ \text{m}}(1.336\times10^4) = 32.43\ \text{W/m}^2.°\text{C}$$

$$A_s = wL = (4\ \text{m})(10\ \text{m}) = 40\ \text{m}^2$$

$$\dot{Q} = hA_s(T_\infty - T_s) = (32.43\ \text{W/m}^2.°\text{C})(40\ \text{m}^2)(12-5)°\text{C} = 9080\ \text{W} = \mathbf{9.08\ kW}$$

If the wind velocity is doubled:

$$\text{Re}_L = \frac{VL}{\nu} = \frac{[(110\times1000/3600)\text{m/s}](10\ \text{m})}{1.413\times10^{-5}\ \text{m}^2/\text{s}} = 2.162\times10^7$$

which is greater than the critical Reynolds number. Thus we have combined laminar and turbulent flow. Using the proper relation for Nusselt number, the average heat transfer coefficient and the heat transfer rate are determined to be

$$Nu = \frac{hL}{k} = (0.037\,\text{Re}_L^{\,0.8} - 871)\,\text{Pr}^{1/3} = [0.037(2.162\times10^7)^{0.8} - 871](0.7340)^{1/3} = 2.384\times10^4$$

$$h = \frac{k}{L}Nu = \frac{0.02428\ \text{W/m.°C}}{10\ \text{m}}(2.384\times10^4) = 57.88\ \text{W/m}^2.°\text{C}$$

$$\dot{Q} = hA_s(T_\infty - T_s) = (57.88\ \text{W/m}^2.°\text{C})(40\ \text{m}^2)(12-5)°\text{C} = 16{,}210\ \text{W} = \mathbf{16.21\ kW}$$

PROPRIETARY MATERIAL. © 2008 The McGraw-Hill Companies, Inc. Limited distribution permitted only to teachers and educators for course preparation. If you are a student using this Manual, you are using it without permission.